



PAINT YOUR WAGON!

How To Apply Your SIJ Rubdown Decal To Your Car:

**Transfer Sheet
(top layer)**



**Protective Liner
(bottom layer)**

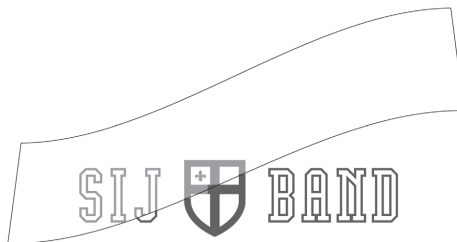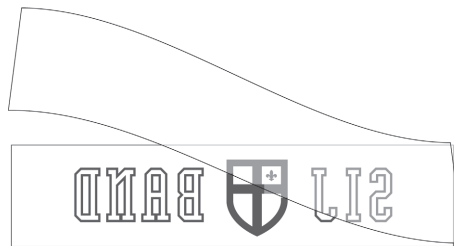

Step 1: Your decal comprises of a transfer sheet (top layer,) a protective liner (bottom layer,) and a decal in-between. First, clean the application area on the exterior side of your car's rear window.

Step 2: Place decal upside down on a hard flat surface, then burnish the entire surface of the protective liner area with your Driver's License (this will secure decal to the transfer sheet.)

Step 3: Remove protective liner and discard.

Step 4: Position the transfer sheet on the exterior side of your car's rear window, then burnish the entire surface of the transfer sheet with your Drivers License.

Step 5: Slowly peel back the transfer sheet and discard.

